




*Uncompromised Visual Clarity
for Text and Graphics.*



Brilliant **TRUIMAGE™ SERIES**

AdsLED TruImage™ LED displays create vibrant images with 256 levels of shading. Command the attention of your target audience with pictures and text messages.

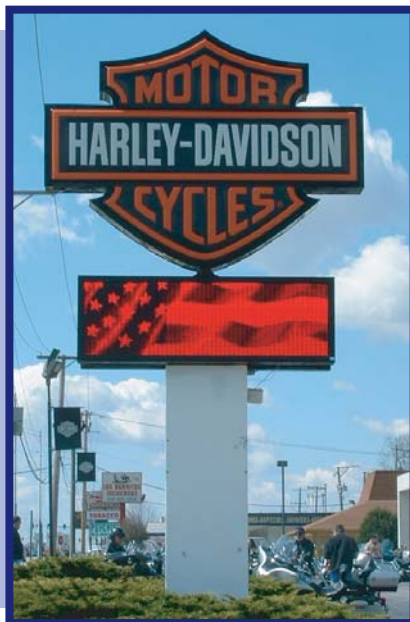

Features:

- Ventless Cabinets reduce air contaminants
- 125 degree viewing angle for max viewing time
- 100,000+ hours of bright LED Lifetime
- 7 Year parts warranty / 24 hour tech support
- Versatile pitch options and sizes for all applications

Communicate.

LEADER

S P E C I F I C A T I O N S


5" Standard Text



Model	Pixel Matrix	Height	Width	Weight (per side)	Power (amps per side)
216-5	16 x 96	11"	5'-6"	70 lbs	3
221-5	16 x 128	11"	7'-4"	94 lbs	4
226-5	16 x 160	11"	9'-2"	110 lbs	5
416-5	32 x 96	1'-10"	5'-6"	92 lbs	6
421-5	32 x 128	1'-10"	7'-4"	111 lbs	7.5
426-5	32 x 160	1'-10"	9'-2"	140 lbs	9.5
616-5	48 x 96	2'-9"	5'-6"	138 lbs	8.5
621-5	48 x 128	2'-9"	7'-4"	174 lbs	11
626-5	48 x 160	2'-9"	9'-2"	212 lbs	14
816-5	64 x 96	3'-8"	5'-6"	165 lbs	11.5
821-5	64 x 128	3'-8"	7'-4"	195 lbs	15
826-5	64 x 160	3'-8"	9'-2"	246 lbs	18.5

10 – 500 ft recommended viewing distances
Excellent for 2-lane roads, smaller and high-resolution graphic applications

10" Standard Text

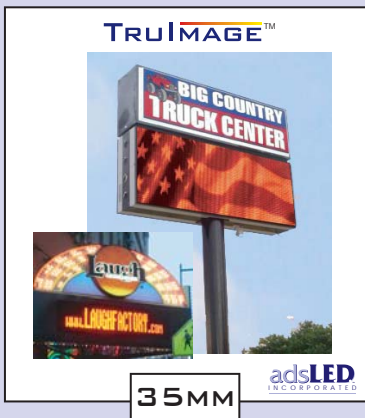

Model	Pixel Matrix	Height	Width	Weight (per side)	Power (amps per side)
210-10	16 x 64	1'-10"	7'-4"	110 lbs	4 red / 9 amber
213-10	16 x 80	1'-10"	9'-2"	140 lbs	5 red / 11 amber
216-10	16 x 96	1'-10"	11'-0"	159 lbs	6 red / 13 amber
310-10	24 x 64	2'-9"	7'-4"	173 lbs	6.5 red / 13.5 amber
313-10	24 x 80	2'-9"	9'-2"	211 lbs	8 red / 17 amber
316-10	24 x 96	2'-9"	11'-0"	238 lbs	8 red / 2 amber
410-10	32 x 64	3'-8"	7'-4"	194 lbs	8 red / 17.5 amber
413-10	32 x 80	3'-8"	9'-2"	246 lbs	10 red / 22 amber
416-10	32 x 96	3'-8"	11'-0"	276 lbs	12 red / 26 amber

300 – 1000 ft recommended viewing distances
Ideal for 4-lane roads and medium viewing distances

18" Standard Text



Model	Pixel Matrix	Height	Width	Weight (per side)	Power (amps per side)
110-18	7 x 64	1'-8"	13'-4"	210 lbs	6 red / 9 amber
113-18	7 x 80	1'-8"	16'-8"	260 lbs	7 red / 11 amber
116-18	7 x 96	1'-8"	20'-0"	310 lbs	8 red / 13 amber
210-18	16 x 64	3'-4"	13'-4"	460 lbs	12 red / 18 amber
213-18	16 x 80	3'-4"	16'-8"	580 lbs	14 red / 23 amber
216-18	16 x 96	3'-4"	20'-0"	690 lbs	17 red / 27 amber

600 – 1800 ft recommended viewing distances
Intended for large roads, state highways and longer viewing distances

24" Standard Text



Model	Pixel Matrix	Height	Width	Weight (per side)	Power (amps per side)
110-24	7 x 64	2'-4"	18'-8"	350 lbs	9 red / 12 amber
113-24	7 x 80	2'-4"	23'-4"	440 lbs	11 red / 15 amber
116-24	7 x 96	2'-4"	28'-0"	530 lbs	13 red / 18 amber
210-24	16 x 64	4'-8"	18'-8"	770 lbs	19 red / 27 amber
213-24	16 x 80	4'-8"	23'-4"	960 lbs	23 red / 33 amber
216-24	16 x 96	4'-8"	28'-0"	1050 lbs	27 red / 39 amber

>800 ft recommended viewing distances
Designed for Freeway and Interstate applications requiring maximum visibility

All Displays include: Windows-Based PC Messaging and Scheduling Software, Temperature Probe, Vendor ID Secure Wireless Transmission, 7-Year Warranty and Unlimited Phone Support.

Popular sizes shown. Additional Sizes are available